


# WS 9100

## Chipboard screws

countersunk head with cross recess Z (Pozidrive) and full thread

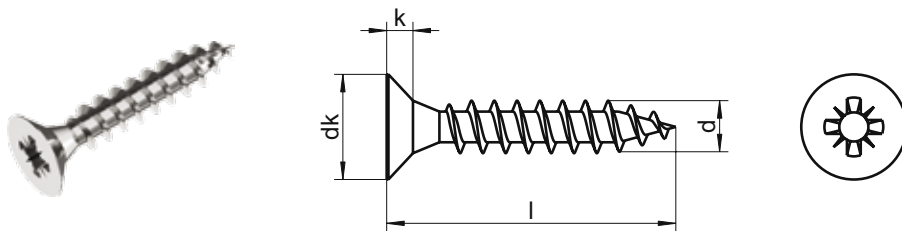

dk max. k min. ⊕	6 1,5 Z 1	7 1,75 Z 2	8 2 Z 2	9 2,25 Z 2	10 2,50 Z 2	12 6,00 Z 3
Length / Ø	3	3,5	4	4,5	5	6
12	▲ ●	▲ ●	▲ ●			
13	▲ ●	▲ ●	▲ ●			
14	▲ ●	▲ ●	▲ ●			
16	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
20	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
25	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
30	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
35	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
40	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
45	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
50	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
55			▲ ●	▲ ●	▲ ●	▲ ●
60			▲ ●	▲ ●	▲ ●	▲ ●
65			▲ ●	▲ ●	▲ ●	▲ ●
70			▲ ●	▲ ●	▲ ●	▲ ●
75			▲ ●	▲ ●	▲ ●	▲ ●
80			▲ ●	▲ ●	▲ ●	▲ ●
90					▲ ●	▲ ●
100					▲ ●	▲ ●
110					▲ ●	▲ ●
120					▲ ●	▲ ●
130					▲ ●	▲ ●
140					▲ ●	▲ ●
SU	1000	1000	500	500 ≥ 40 200	500 ≥ 65 100	200 ≥ 70 100

■ A1 / ▲ A2 / ● A4 | SU: Sales unit | All measurements in mm | Other dimensions on request.

Example item no. 9100-2-6X40 WS 9100 - A2 - Ø 6mm - l = 40mm